




SELF-SERVICE

# SR-11-16-23 HE HEAT PUMP

ULTIMATE EFFICIENCY,  
ULTIMATE TECHNOLOGY.




## FEATURES

- Tumble dryer with **Heat Pump** technology.
- No need of exhaust to the exterior.
- **Auto-reverse Drum**: the drying process is more efficient; offers better uniformity; avoiding the tangling of big pieces.
- **Frequency inverter**: controls rotating speed and reverse drum action.
- **Filter drawer** with wide surface and improved airflow made of stainless steel.
- High efficiency additional filter, category G4, to protect exchangers.
- Outer casing in **grey skin-plate**, stainless steel look.
- **Stainless Steel Drum**.
- **2 different ranges**:
  - "MP Control" range: easy and intuitive **electronic** control offers a complete control of the process: possibility to select required drum speed, statistics control, technical menu, alarms, etc.
  - "**Self-Service**" range: specific MP control for the self-service industry with several payment options: central payment, coin/token or with prepaid card systems.
- **Soft Touch**: the stamped drum perforations make sure the liner is gently handled, lengthening the garments lifetime.
- **Mixed Flow**: the system of mixed axial-radial airflow increases the efficiency of the whole drying process due to the improvement of the air-flow inside the drum.
- Big loading door (opening of 180°). Double door-glass.
- Transmission of movement by gear motor (direct drive).
- Cool Down: anti-wrinkle at the end of cycle.
- These models use water to refrigerate, which may be reused to wash.

## OPTIONS:


- Wooden crate.
- Stainless steel front and side panels.
- Front panel in stainless steel.

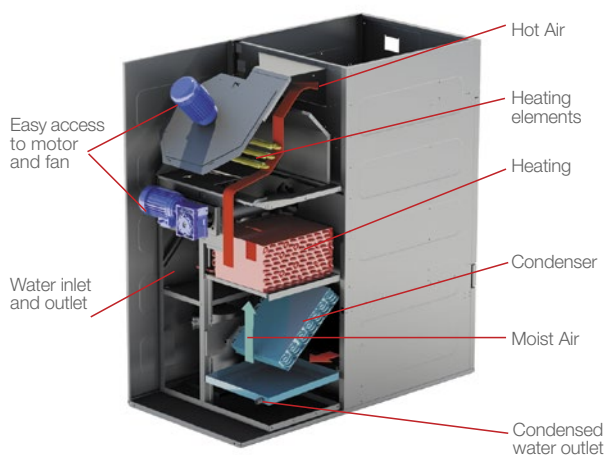

TECHNICAL DATA

TECHNICAL DATA	UNIT.	SR-11 HEAT PUMP	SR-16 HEAT PUMP	SR-23 HEAT PUMP
<b>CAPACITY</b>				
Capacity 1/18	kg	11,7	18,3	25,6
Capacity 1/20	kg	10,5	16,5	23
Hourly Output	kg/h	10,4	12	12,7
Evaporation capacity	l/h	5,2	6	6,4
<b>DRUM</b>				
Ø Drum	mm	750	750	855
Drum length	mm	475	746	800
Drum volume	l	210	330	460
Ø Loading door	mm	574	574	574
<b>POWER</b>				
Drum motor power	kW	0,37	0,37	0,37
Electric Heating (Installed power)	kW	3,8 + 4,0 (7)	3,8 + 4,0 (7)	3,8 + 4,0 (7)
Electric Heating (Total Installed power)	kW	4,65 (8)	4,65 (8)	4,77 (8)
Energetic consumption	* kWh/ l	0,89	0,77	0,75
Nominal airflow	m³/h	1.200	1.200	1.200
Fan Motor Power	kW	0,55	0,55	0,55
<b>CONNECTIONS</b>				
Tension 400V - III + N + T (50 Hz)	Nº x mm² / A	5 x 1,5 / 20	5 x 1,5 / 20	5 x 1,5 / 20
Heat pump inlet (Cooling)	BSP	1/2 "	1/2 "	1/2 "
Heat pump outlet (Cooling)	BSP	1/2 "	1/2 "	1/2 "
Drain	BSP	3/4 "	3/4 "	3/4 "
<b>DIMENSIONS / PACKING DIMENSIONS</b>				
Width / Width	mm	785 / 865	785 / 865	890 / 970
Depth / Depth	mm	1.315 / 1.415	1.585 / 1.685	1.720/1.820
Height / Height	mm	1.694 / 1.840	1.694 / 1.840	1.812 / 1.940
Net weight / Gross weight	kg	272 / 280	287 / 300	310 / 330
<b>OTHERS</b>				
Sound level	dB	64	64	64

\* kWh per litre of evaporated water.

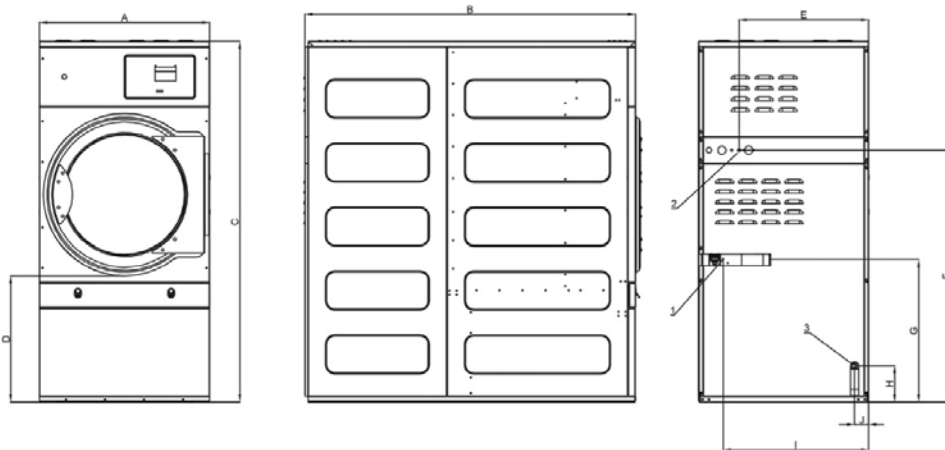

- ① Refrig. water intake. (mains)
- ② Electrical connection
- ③ Refrig. water outlet (warm water)

	A	B	C	D	E	F	G	H	I	J
<b>SR-11 HE</b>	785	1.315	1.694	618	600	1.190	685	210	586	65
<b>SR-16 HE</b>	785	1.585	1.694	618	600	1.190	680	210	586	65
<b>SR-23 HE</b>	890	1.720	1.812	672	660	1.190	680	210	646	125